


|                            |   |                      |   |
|----------------------------|---|----------------------|---|
| <b>G.V.W.R.</b>            | 48,000#                                   | <b>Axle</b>          | (2) 22,500# Dual Wheel Air Brake - Oil Bath                                       |
| <b>G.A.W.R. (Ea. Axle)</b> | 18,160#                                   | <b>Supension</b>     | 44K Adjustable  |
| <b>Coupler</b>             | 60,000# 3" ID Pintle Eye                  | <b>Tire</b>          | ST215/75 R-17.5 Load Range H  |
| <b>Safety Chains</b>       | 1/2" Grd. 80 w/Safety Latch Hook (2 each) | <b>Wheel</b>         | 6.75 x 17.5, 10 Bolt Budd   |
| <b>Jack</b>                | 12K TW Drop Leg Jack                      | <b>Floor</b>         | 2" Nominal Oak (S4S)  |
| <b>Tongue</b>              | Integral w/Frame                          | <b>Lights</b>        | LED D.O.T. Stop, Tail, Turn & Clearance   |
| <b>Top Rail</b>            | None                                      | <b>Elec. Plug</b>    | 7 Way Semi Style  |
| <b>Frame</b>               | 14", 26# I-Beam                           | <b>Finish (Prep)</b> | Steel is Cleaned to Ensure a Professional Smooth Finish.                          |
| <b>Crossmembers</b>        | 6" Jr. I-Beam on 16" Centers              |                      |   |
| <b>Side Rails</b>          | 8" Channel                                | <b>FINISH</b>        | Superior Quality Finish is Applied for a Highly Decorative and Protective Finish. |

## Standard Features

- 3 Position Pintle Adjustment
- Storage Area in Tongue
- Modular Sealed Wiring Harness w/Junction Box
- Bolt On Jack
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- 2 Side Bed Steps
- Oak Flooring
- 6 - 1" O.D. D-Rings
- Heavy Duty Oil Bath Axles w/12-1/4" x 7-1/2" Air Brakes, Including Automatic Slack Adjusters & Spring Brakes on Both Axles
- Anti-Skid Brake System on Front Axle
- 5' Dove Tail w/Double Hinged Spring Assist Ramps
- Grommet Mount Sealed LED Lighting

## Description

| Dimensions |      |      |      |
|------------|------|------|------|
| Length     | A    | B    | C    |
| 20' + 5'   | 300" | 187" | 113" |
| 24' + 5'   | 348" | 211" | 137" |

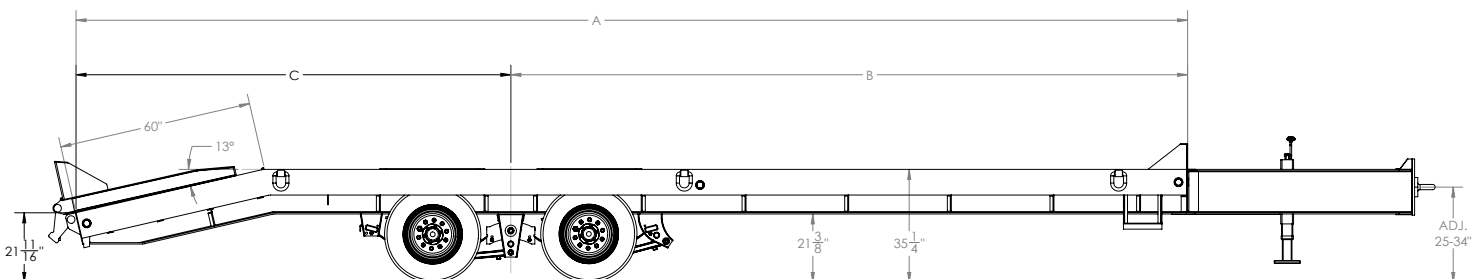

# 4XPH Pintle Heavy Equipment Transport ●



Shown with optional dual drop leg jacks and lockable lid over tongue

| Model      | Weight* | Description                         |
|------------|---------|-------------------------------------|
| *4XPH-20+5 | 8,950#  | 102" x 20' + 5' Equipment Transport |
| *4XPH-24+5 | 10,150# | 102" x 24' + 5' Equipment Transport |

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

| Category      | Description                               |
|---------------|---|
| JACKS         | Single 2 Speed Drop Leg Jack (25K)        |
| JACKS         | Dual Single Speed Drop Leg Jacks          |
| JACKS         | Dual 2 Speed Landing Gear Jacks (50K)     |
| TIRE/WHEEL    | Spare Tire (ST215/75 R-17.5 LR-H Dual)    |
| TIRE/WHEEL    | Vertical Spare Mount                      |
| BRAKES        | ABS on 2nd Axle                           |
| BODY          | Lockable Lid Cover Tool Storage in Tongue |
| BODY          | Wood Fill Dovetail & Ramps                |
| CARGO CONTROL | 1" D-Ring (Each)                          |

**\* Trailer is subject to Federal Excise Tax**